

RX63 & RX72 Scissor Lifts

Low-profile, high-capacity

NEW & UPDATED




RX63 & RX72 Scissor Lifts

Massive capacity
with a small footprint

STANDARD

Extra-wide runways

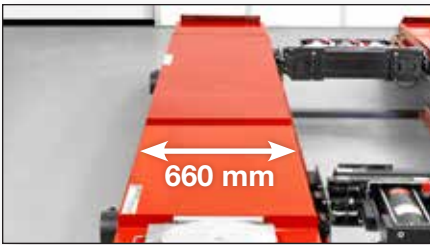

- ✓ 660 mm (26 in.) runways accept wide, heavy vehicles

OPTIONAL


Stainless steel turnplates



- ✓ Maximum corrosion resistance for long life
- ✓ Optional PowerSlide® turnplates (shown) lock/unlock automatically

STANDARD

Integrated air line

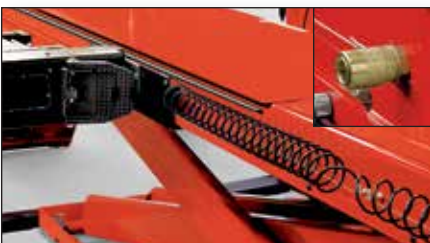

- ✓ Convenient air source for tools at front and rear

PATENTED

Sensor feedback system*



- ✓ Sensors keep runway level
- ✓ Safely stops if obstructed



STANDARD

Velocity safety fuses




- ✓ Instantaneous shutdown in event of hydraulic failure

Low drive-on and high raise height



- ✓ Only 273 mm (10.75 in.) fully lowered
- ✓ Comfortable 1828 mm (72 in.) maximum height
- ✓ Reduces clearance issues

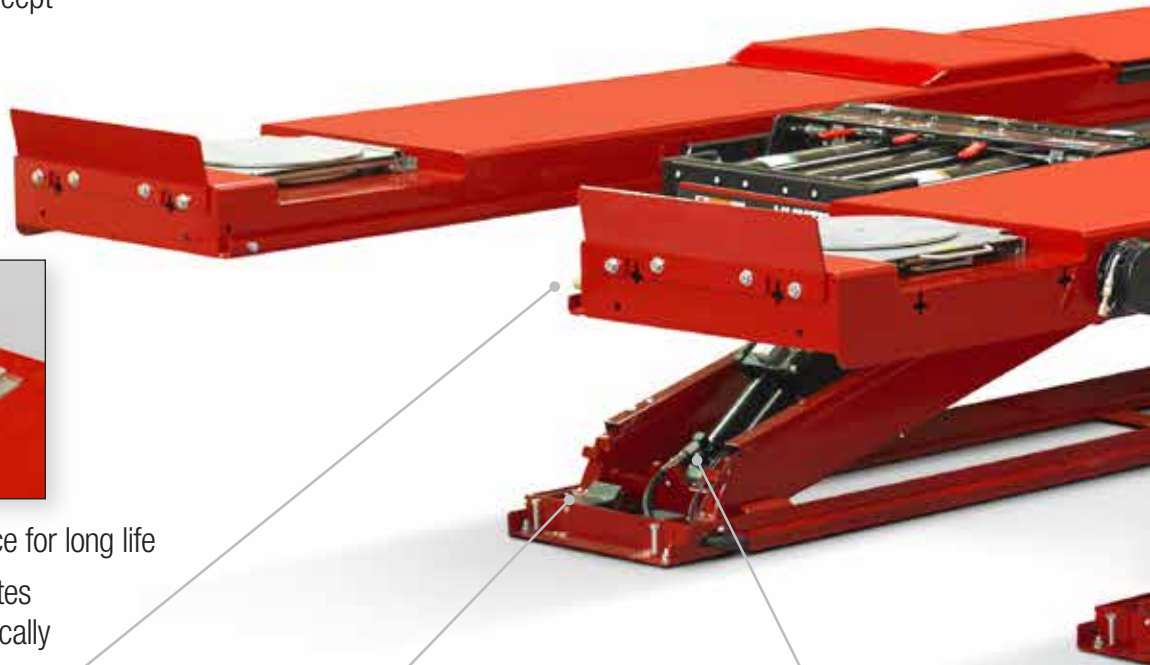

* Shown with protective cover removed

OPTIONAL


Two Swing Air Jacks



- ✓ 4080-kg (9000-lb.) capacity
- ✓ Technicians' favorite

EXCLUSIVE

Louvered ramps

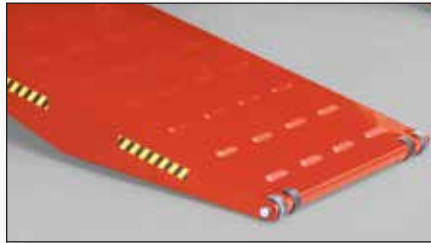

- ✓ Prevent wheel spin in wet conditions
- ✓ More effective than diamond tread or abrasive strips

PATENTED

Control panel



- ✓ Complete operation from the console
- ✓ Optional PowerSlide® Inflation Station and FIA control



RX63KIS-435E shown with optional light kit, Swing Air Jacks, and front turnplates

STANDARD

Safety locks



- ✓ Precision-fit teeth lock runways at 16 level height positions

EXCLUSIVE

Movable work steps



- ✓ 10 secure positions
- ✓ Lightweight design

PATENTED

OPTIONAL

Inflation Station



- ✓ Automatically fills or bleeds each tire
- ✓ No dangling air lines

Exclusive features, enhanced capabilities

EXCLUSIVE

Fast descent speed

- ✓ 50% faster lowering times
- ✓ Ensures a soft landing by automatically slowing the last several inches

FAST
Descent

0:25

0:50

Others



OPTIONAL

Swing Air Jacks

- ✓ Lift vehicles off the runways during alignment procedures and other multi-service operations
- ✓ 4080-kg (9,000-lb.) capacity
- ✓ Folding design provides lowest-profile

133-84-1 — 4080-kg (9000-lb.) Capacity Swing Air Jack

EXCLUSIVE

RX72K flush-mount

- ✓ Accommodate lowered vehicles or expensive spoilers
- ✓ Ideal for “showcase” shops
- ✓ Drive-thru capability



EXCLUSIVE **OPTIONAL**

AlignLights system

- ✓ Bright and efficient LED light source underneath the vehicle
- ✓ Automatically turns on when the lift is raised and turns off when the lift is lowered to the floor
- ✓ AlignLights is an ALI-listed accessory

20-3438-1 — *AlignLights system*



Standard equipment

- ✓ Flush-mounted, full-floating slipplates (PowerSlide® slipplates on PS and IS models)
- ✓ Two movable work steps (not included with flush-mount installations)
- ✓ Louvered ramps with built-in wheel stops
- ✓ Approach ramp extension kit – 305 mm (12 in.)
- ✓ Front wheel stops
- ✓ Two wheel chocks
- ✓ Built-in, full-length jack rails
- ✓ Built-in air line kit

OPTIONAL


Extension kits

Approach ramp extensions

Extensions lessen the ramp incline for high-floor-slope installs and ease service for specialty vehicles.



432 mm (17 in.) kit – 20-3113-1
Adds 127 mm (5 in.) to RX63K



1016 mm (40 in.) kit* – 20-2169-1
Adds approximately 711 mm (28 in.) to RX63K

1270 mm (50 in.) kit* – 20-2189-1
Adds approximately 965 mm (38 in.) to RX63K

Wheel stop extension

Provides additional space for conventional sensors and vehicles with low spoilers.



20-2497-1
Adds approximately 305 mm (12 in.) to RX63K

Drive-thru conversion*



1320 mm (52 in.) kit
20-2498-1 For camera sensors
1600 mm (63 in.) kit
20-2501-1 For conventional sensors


* Quick-release pins included.

Hunter offers two fully integrated options to enhance productivity



FIA Fully Integrated Alignment

FIA allows WinAlign® aligners to control the lift features for ultimate productivity. Two patented designs offer greater flexibility and time-saving capabilities.

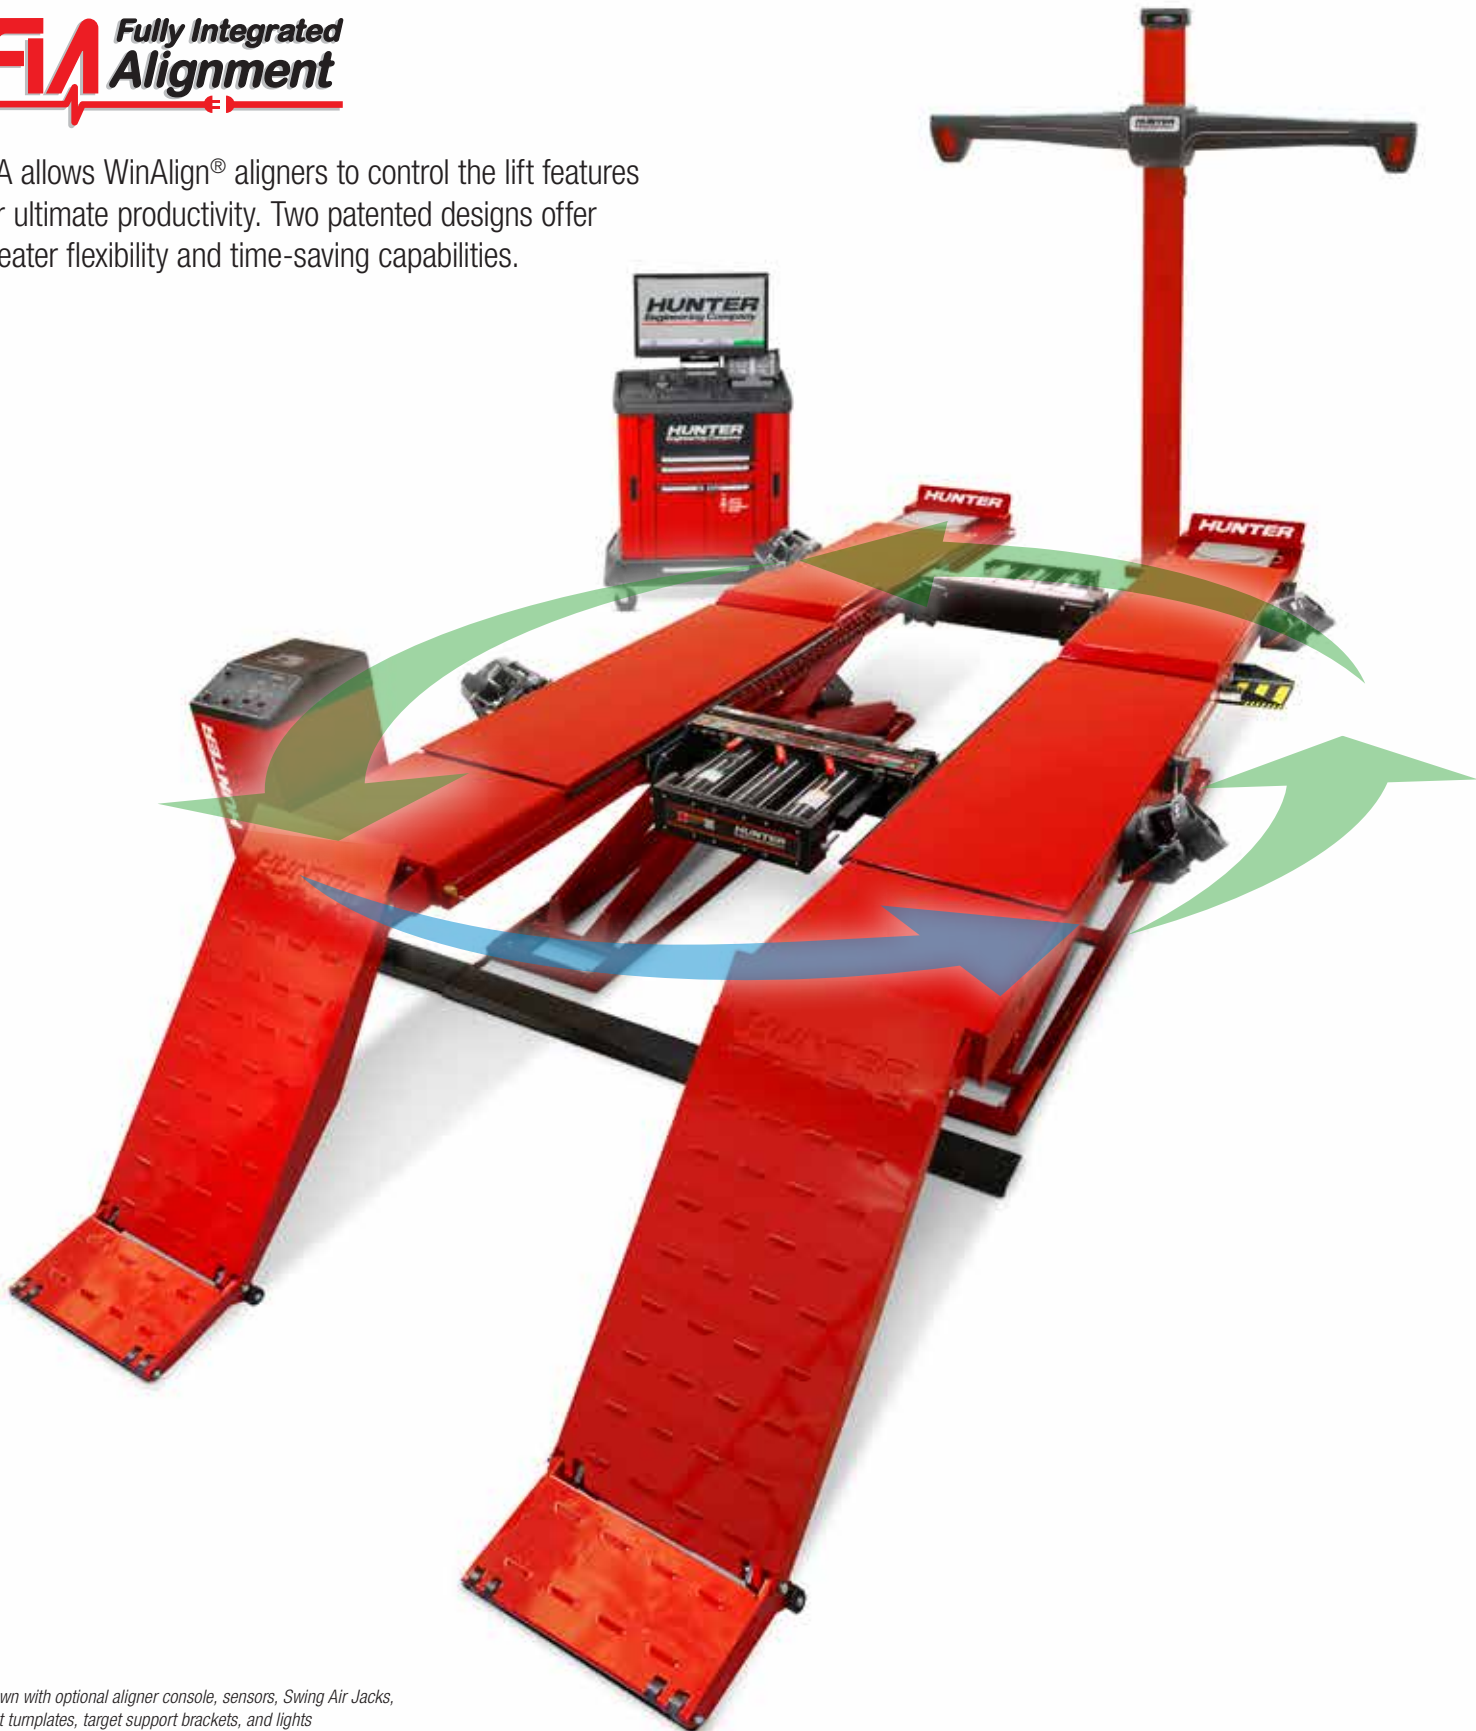

Shown with optional aligner console, sensors, Swing Air Jacks, front tumplates, target support brackets, and lights




PATENTED

PowerSlide® edition


- ✓ Locks slipplates and turnplates with the touch of a button or automatically through an FIA-equipped aligner*
- ✓ No more struggles with lock pins
- ✓ Avoid wear and tear and extend the life of your turnplates



OPTIONAL

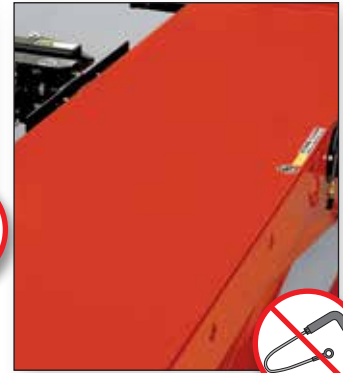


OPTIONAL

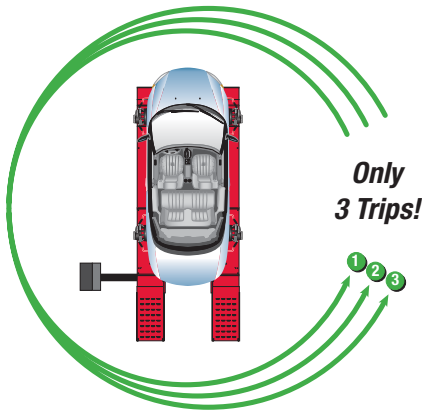

Minimize trips around the car

- 1 Mount targets
- 2 Make adjustments
- 3 Remove targets
- 4 Jack vehicle and compensate sensors
- 5 Lower leveling legs (if equipped)
- 6 Remove slipplate and turnplate pins
- 7 Replace slipplate and turnplate pins
- 8 Raise leveling legs (if equipped)


Yesterday's Technology

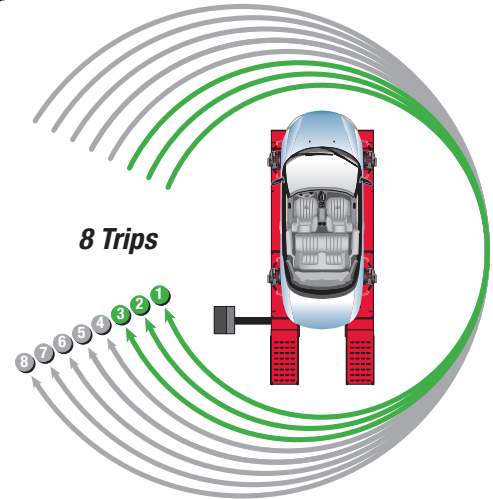

PATENTED

Inflation Station edition

- ✓ Includes PowerSlide® slipplates and turnplates
- ✓ Automatically inflate all four tires simultaneously
- ✓ Record starting and final pressure*
- ✓ Hose recoils to keep work area clear

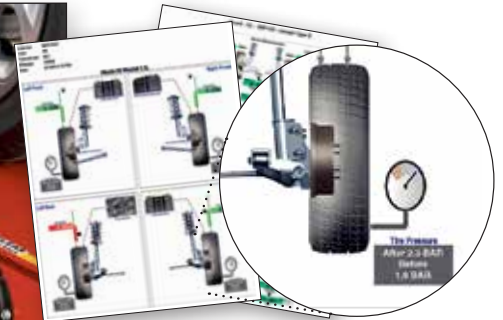

Printouts show starting and final tire pressures.*

* Requires FIA equipped aligner with WinAlign® 10.x software or greater

Specifications

	Flush-mount RX72KF	Surface-mount RX63K
Max. vehicle weight	7257 kg (16000 lbs.)	6350 kg (14000 lbs.)
Max. wheelbase		
General service	4648 mm (183 in.)	4749 mm (187 in.)
Two-wheel alignment	4521 mm (178 in.)	4623 mm (182 in.)
Four-wheel alignment	4013 mm (158 in.)	
Min. four-wheel alignment	2235 mm (88 in.)	
Lowered height	N/A	273 mm (10.75 in.)
Max. lifting height	1803 mm (71 in.)	1828 mm (72 in.)
Alignment height	All lock positions	
Runway width	660 mm (26 in.)	
Tread width		
Min. inside	1016 mm (40 in.)	
Max. outside	2337 mm (92 in.)	
Air pressure	6.2-10.3 bar (90-150 psi)*	
Speed	60 seconds (raise) 25 seconds (descent)	

* 8.6 bar (125 psi) required for full jack capacity

Models

	RX72KFIS	RX63KIS	RX72KFPS	RX63KPS	RX72KF	RX63K
Fully Integrated Alignment	✓	✓	✓	✓		
Inflation Station	✓	✓				
PowerSlide® slippates	✓	✓	✓	✓		
Flush-mounted	✓		✓		✓	

Add one of the following suffixes to the desired model number listed above (ex. RX72K-435E):

Suffix	Power configuration
-215E	208/230V, 1PH, 50Hz
-216E	208/230V, 1PH, 60Hz
-435E	208/230/400/460V, 3PH, 50Hz


Because of continuing technological advances, specifications, models and options are subject to change without notice.

PowerSlide and WinAlign are registered trademarks of Hunter Engineering Company. The PowerSlide logo is a trademark of Hunter Engineering Company.

0819BH

Copyright © 2019, Hunter Engineering Company

RX63K Plan View

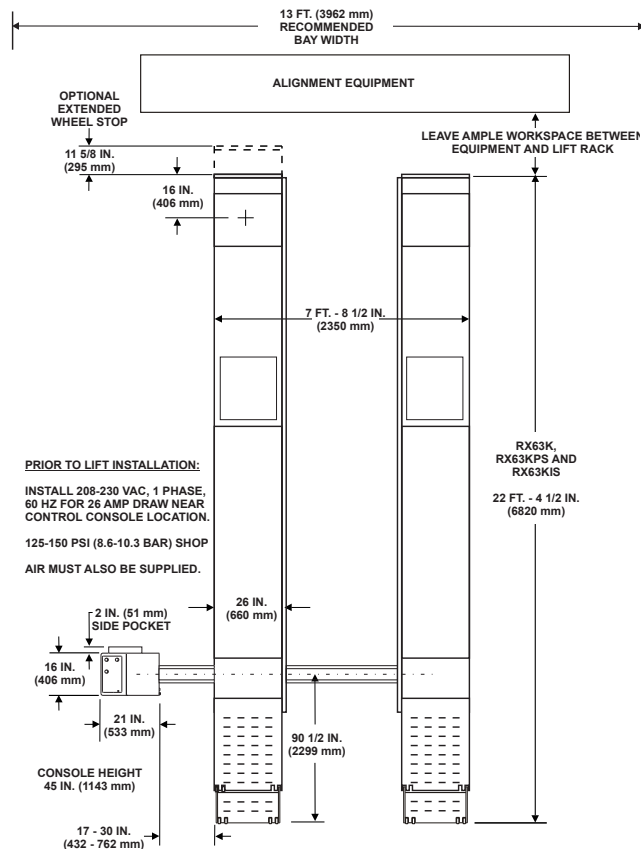

See your Hunter Sales Representative for details on site requirement.

HUNTER
Engineering Company

www.hunter.com

11250 Hunter Drive, Bridgeton, MO 63044, USA
Tel: +1-314-731-3020, Fax: +1-314-731-0132
Email: international@hunter.com

Form 7473-TE-05, 08/19
Supersedes Form 7473-TE-05, 04/18