

# **VAS 6560 Tire Changer**

*Professional tilt-column tire changer*




*TCX54VAGE shown with optional right-side press system*

# Specifications

<b>Electrical</b>	230V, 1ph, 50/60Hz
<b>Wheel clamping</b>	
External (min-max)	12 - 24 in.
Internal (min-max)	14 - 27 in.
<b>Maximum tire diameter</b>	1100 mm
<b>Maximum rim width</b>	14 in.
<b>Bead loosener width</b>	390 mm
<b>Table rotation speed</b>	7 and 16 rpm clockwise 7 counter-clockwise
<b>Noise level</b>	<70 dB(A)
<b>Operation pressure</b>	8 - 10 bar
<b>Machine weight</b>	275 kg
<b>Dimensions</b>	
Height	1960 mm
Width	1340 mm
Depth	2000 mm

*Some dimensions, capacities and specifications may vary depending on tire and wheel configurations.*

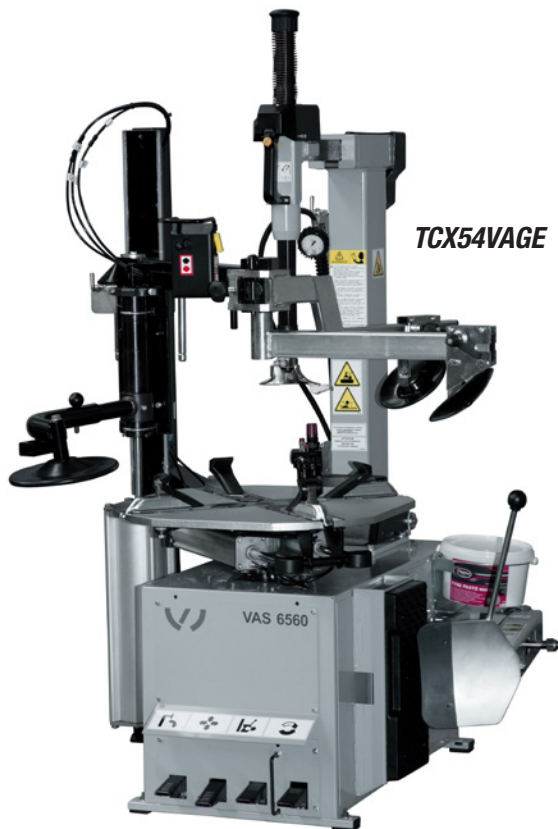

## Model

**TCX54VAGE** TCX54 230V, 1ph, 50/60Hz

## Standard equipment

- ✓ BPS30 with fixed BPT
- ✓ Tire bead lever
- ✓ Tire bead lever protectors (2)
- ✓ Spare mounthead protectors (5)
- ✓ Inflation hose and gauge
- ✓ Mounting paste and brush
- ✓ Jaw Protectors (4)
- ✓ Side Shovel Protectors (5)
- ✓ WDK spacer

## Optional equipment

- RP11-8-11400149** Wheel lift
- RP11-8-11400197** Quick exchange mount head device
- RP11-8-11100402** Jaw extender/reducer  
Extends range to 30 in. (+ 4 in.) or  
reduces range to 6 in. (- 4 in.)
- RP11-5-490223** Set of 4 shovel protectors
- RP11-8-11400098** Set of 4 bead lever protectors
- RP11-8-11100358** Set of 8 hi-grip jaw protectors
- RP11-8-11400085** Set of 8 standard jaw protectors
- RP11-2200277** Set of standard motorcycle adaptors

*Because of continuing technological advancements, specifications, models and options are subject to change without notice.*

1217BH

Copyright © 2017, Hunter Engineering Company

**HUNTER**  
Engineering Company

[www.hunter.com](http://www.hunter.com)

11250 Hunter Drive, Bridgeton, MO 63044, USA  
Tel: 1-314-731-3020, Fax: 1-314-731-0132  
Email: [international@hunter.com](mailto:international@hunter.com)

Form 6711-TE-05, 12/17  
Supersedes form 6711-TE-05, 12/13