

# ***TCX640HD Tire Changer***

***For trucks, tractors & other heavy-duty equipment***




# TCX640HD at a glance



## EXCLUSIVE

### Operator-Friendly

- ✓ Mobile pedestal control unit
- ✓ Safe and efficient



## STANDARD

### Convenient Storage

- ✓ Integrated tool storage on base



### Tulip-Style Clamp

- ✓ Two-speed chuck rotation operates clockwise and counter-clockwise
- ✓ Standard clamping capacity of 14-46 in. (356-1168 mm)



## Powerful and Efficient

- ✓ 3527-lb. (1600-kg) capacity spindle head lifts the wheel into position.
- ✓ Power pump runs only when the tire changer is in use

### STANDARD

## Accessories to Assist

- ✓ Standard disk and hook for mounting and demounting
- ✓ Hydraulic-powered carriage shuttles the wheel toward the clamp



## Mount and demount with ease



- ✓ Position the wheel pliers and roll the first bead onto the rim
- ✓ Reposition the pliers and roll the second bead on
- ✓ Bead loosening and demounting can be as easy as rolling the tire off of the rim in a single step



The standard hook tool is used to mount and demount tubed and super single tires or more difficult-to-handle wheel assemblies.



Tractor, implement and other specialty wheel assemblies are serviced using the same tools and techniques.

# Specifications

## Power capacity

Pump motor	2 hp
Gearbox motor (2-speed)	2 hp

<b>Min. center hold clamping</b>	3.94 in. (100 mm)
	14-46 in. (356-1168 mm)


<b>Rim clamping capacity</b>	Up to 56 in. with optional accessories
------------------------------	--

<b>Wheel assembly capacity</b>	
Max. diameter	90.5 in. (2299 mm)
Max. width	42 in. (1067 mm)
Max. weight	3,500 lbs. (1588 kg)

<b>Torque</b>	
Low speed	4,800 ft.-lbs. (2.3 bars)
High speed	3,300 ft.-lbs. (1.58 bars)

<b>Speed</b>	10 rpm and 5 rpm
--------------	------------------

<b>Operating voltage</b>	230V 3 Phase-60hz, 26A
--------------------------	------------------------

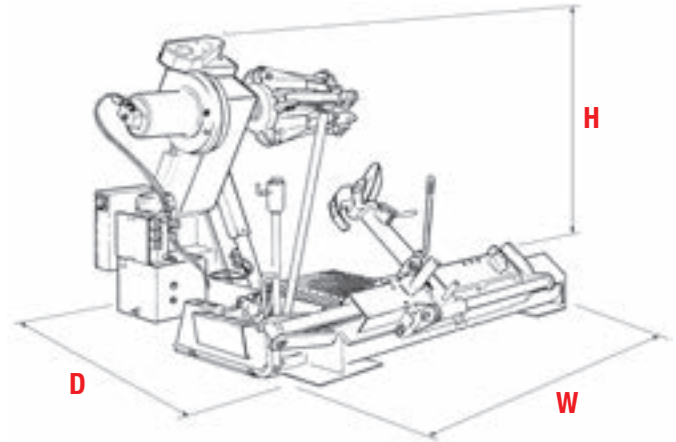


## Dimensions (min-max)

Height (H)	37-61 in. (940-1550 mm)
Width (W)	80-94 in. (2032-2388 mm)
Depth (D)	64-83 in. (1626-2108 mm)
<b>Weight</b>	1631 lbs. (740 kg)

## Model Number

TCX643HD

## Standard Accessories

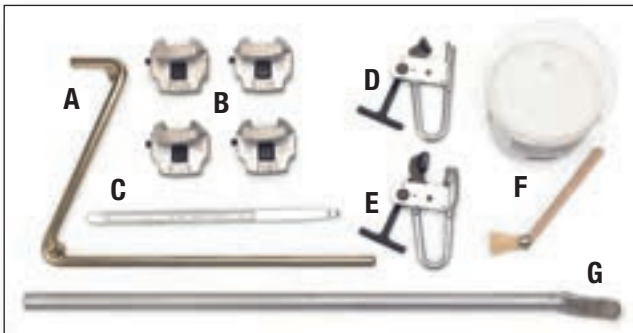

- A.** Bead guide bar
- B.** Alloy wheel clamping jaws
- C.** Standard lever
- D.** Steel wheel pliers
- E.** Aluminum wheel pliers
- F.** Lubricant and application brush
- G.** Bead lever

## Optional Accessories



- A. RP11-2306040** – Tubeless roller for easy bead loosening, mounting and demounting of tubeless truck and bus tires
- B. RP11-8-12100155** – Extensions for self-centering tulip chuck increasing maximum clamping size to 56 in.
- C. RP11-801251904** – Drop-center clamp for skidder and similar type tires

*Because of continuing technological advancements, specifications, models and options are subject to change without notice.*

0317LH

Copyright © 2017, Hunter Engineering Company

**HUNTER**  
Engineering Company

[www.hunter.com](http://www.hunter.com)

Form 5573-T, 04/17  
Supersedes form 5573-T, 07/15