


# RX72F & RX72F-PS

## Flush Mount Lift Rack

**HUNTER**  
Engineering Company

### SPECIFICATIONS

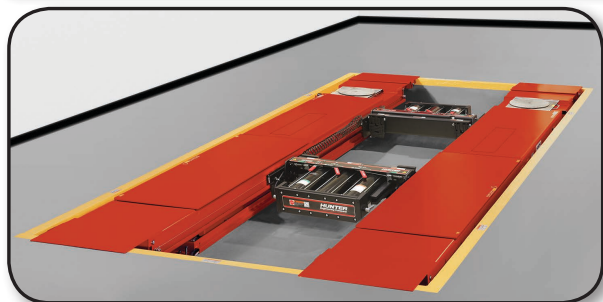

*RX72F-PS Shown (jacks optional)*

#### Power Requirements (for available models)

**215E** 200/208/230 VAC, 1 phase, 50 or 60 HZ,  
26 Amp draw

**435E** 208/230/400/460 VAC, 3 phase, 50 HZ,  
18 Amp (208/230) / 9 Amp (400/460) draw

#### Site Specifications (Refer to 7065-TE for full site requirements)

**Air Supply Requirements** 6.2-10.3 bar (90-150 PSI)  
Jacks require 8.6 bar (125 PSI) @ full capacity

**Minimum Concrete Spec.** 76 mm (3 in.) thick,  
20,700 kPa (3000 PSI) rating

**Maximum Floor Slope** 51 mm (2 in.) over 3200 mm (126 in.)

#### Product Specifications

**Max. Vehicle Weight** 7200 kg (16,000 lbs.)

#### Max. Wheelbase

**General Service** 4750 mm (187 in.)

**Two-Wheel Alignment** 4623 mm (182 in.)

**Four-Wheel Alignment** 4013 mm (158 in.)

**Alignment Height** All lock positions

**Min. Four-Wheel Alignment** 2235 mm (88 in.)



**Lifting Speed** 1-speed, 60 seconds

**Lowering Speed** 2-speed, 25 seconds

### MODEL FEATURES / DIMENSIONS

Features	F	F-PS
2-Speed Lifting and Lowering	✓	✓
<b>FIA</b> Fully Integrated Alignment		✓
<b>POWER SLIDE</b>		✓
<b>INFLATION STATION</b>		
9000-lb Swing Air Jacks	Available Option	

Dimension	
Outside Width ( <b>W1</b> )	2350 mm 92.5 in.
Inside Width ( <b>W2</b> )	1016 mm 40 in.
Length ( <b>L</b> )	5877 mm 231.375 in.
Deck Length ( <b>DL</b> )	5512 mm 217 in.
Runway Width ( <b>R</b> )	660 mm 26 in.
Raised Height ( <b>H1</b> )	1829 mm 72 in.
Stack Height ( <b>H2</b> )	375 to 387 mm 14.75 to 15.25 in.

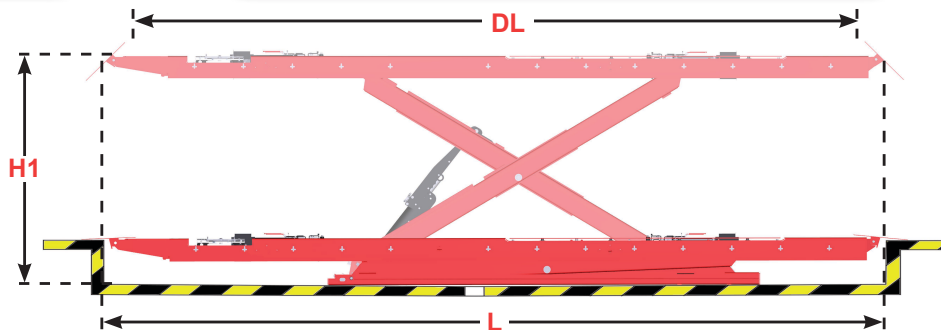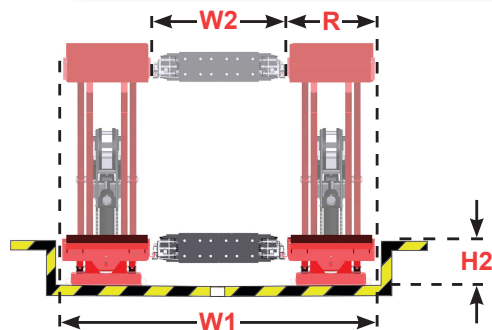

Continued on Page 2

For general inquiries visit:  
[www.hunter.com](http://www.hunter.com)


For local contact visit:  
[www.hunter.com/hunter-international](http://www.hunter.com/hunter-international)

# RX72F & RX72F-PS

## Flush Mount Lift Rack

**HUNTER**  
Engineering Company

**SPECIFICATIONS (Refer to 7065-TE for full substructure construction requirements)**

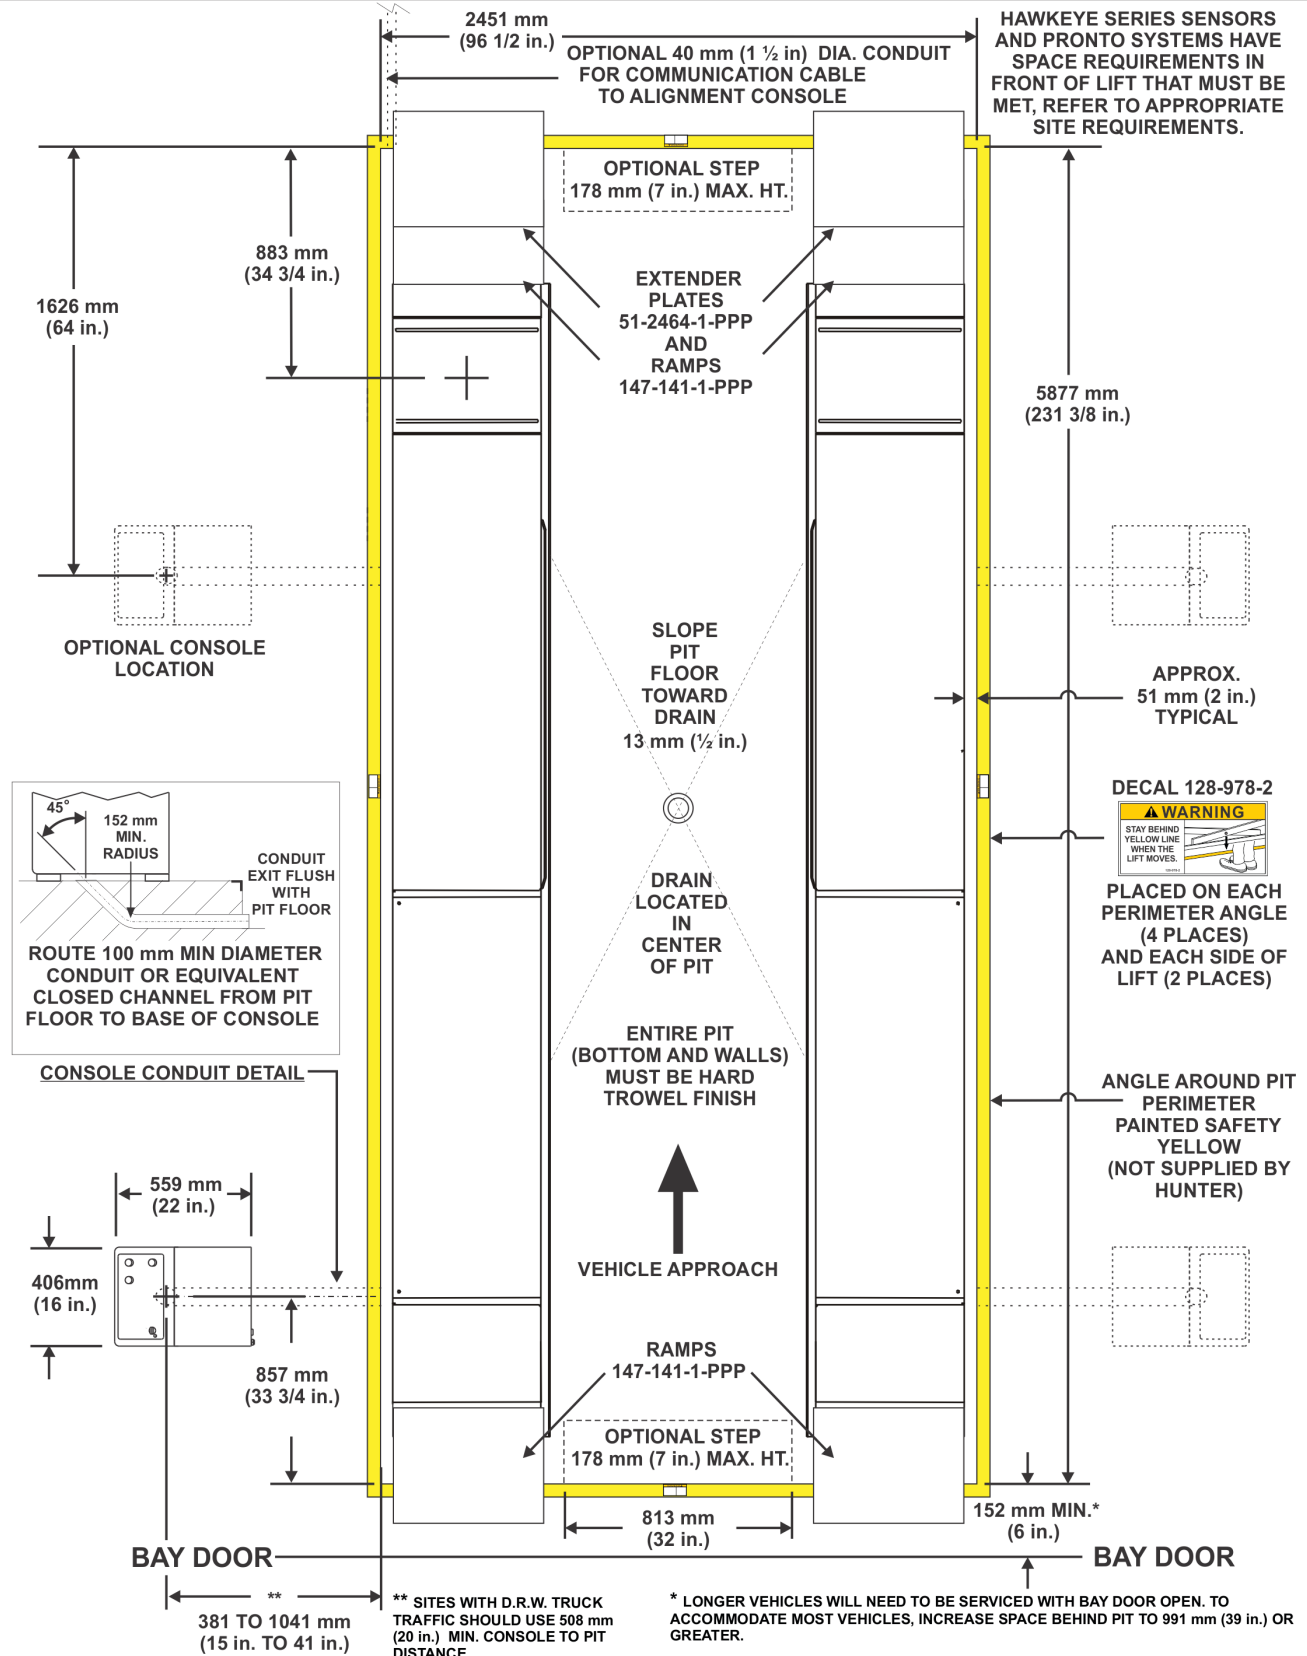

\*Non-standard positioning of control console is limited to a maximum space between console and rack of 1829 mm (72 in.) at the approach ramp end and 5182 mm (204 in.) at the turnplate end. Additional threshold and perhaps hydraulic hoses will be required (refer to Installation Instruction for details).

All dimensions shown are for finished pit. Accomodate tile thickness as needed.

Form 6548-TE, 10-15  
Supersedes Form 6548-TE, 08-13a  
Copyright © 2014-2015, Hunter Engineering Company