
# RX72F-IS Flush Mount Lift Rack

**SPECIFICATIONS** 

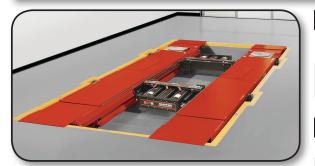


RX72F-IS Shown (jacks optional)

Power Requirements (for available models)		
215E	200/208/230 VAC, 1 phase, 50 or 60 HZ, 26 Amp draw	
435E	208/230/400/460 VAC, 3 phase, 50 HZ, 18 Amp (208/230) / 9 Amp (400/460) draw	

# Site Specifications (Refer to 7065-TE for full site requirements)

Air Supply Requirements	6.2-10.3 bar (90-150 PSI) Jacks require 8.6 bar (125 PSI) @ full capacity		
Minimum Concrete Spec.	76 mm (3 in.) thick, 20,700 kPA (3000 PSI) rating		
Maximum Floor Slope	51 mm (2 in.) over 3200 mm (126 in.)		
Product Specifications			
Max. Vehicle Weight	7200 kg (16,000 lbs.)		
Max. Wheelbase			
General Service	4750 mm (187 in.)		
Two-Wheel Alignment	4623 mm (182 in.)		
Four-Wheel Alignment	4013 mm (158 in.)		
Alignment Height	All lock positions		
Min. Four-Wheel Alignment	2235 mm (88 in.)		
Lifting Speed	1-speed, 60 seconds		
Lowering Speed	2-speed, 25 seconds		

### **MODEL FEATURES / DIMENSIONS**

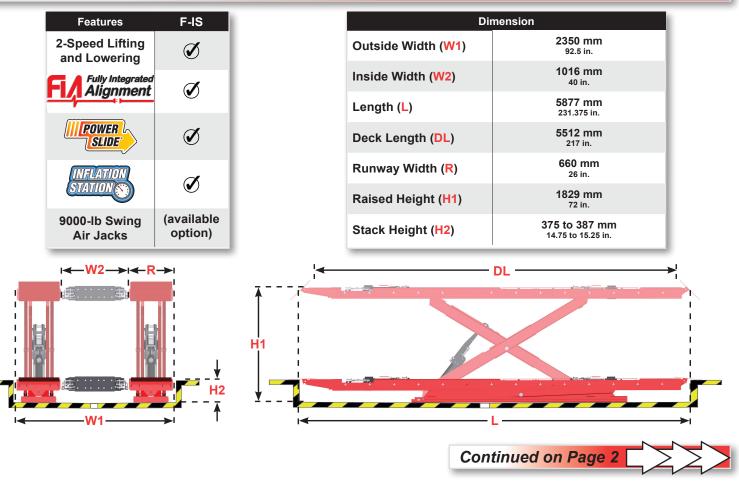

For general inquiries visit: www.hunter.com


For local contact visit: www.hunter.com/hunter-international



# RX72F-IS Flush Mount Lift Rack



#### SPECIFICATIONS (Refer to 7065-TE for full substructure construction requirements)

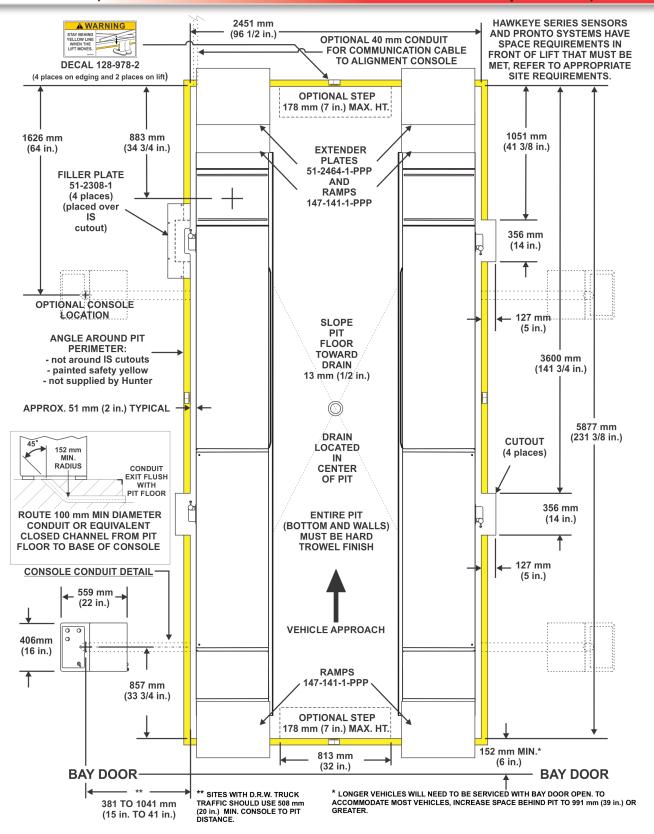

\*Non-standard positioning of control console is limited to a maximum space between console and rack of 6 feet (1829 mm) at the approach ramp end and 17 feet (5182 mm) at the turnplate end. Additional threshold and perhaps hydraulic hoses will be required (refer to Installation Instruction for details).

All dimensions shown are for finished pit. Accomodate tile thickness as needed. Copyright © 2014-2015, Hunter Engineering Company