

# RX45K & RX45KL (PS & IS)

## Surface Mount Lift Racks

**HUNTER**  
Engineering Company

### SPECIFICATIONS



RX45KIS-215E Shown (jacks optional)

#### Power Requirements (for available models)

215E	200/208/230 VAC, 1 phase, 50 HZ, 26 Amp
216E	200/208/230 VAC, 1 phase, 60 HZ, 26 Amp
435E	208/230/400/460 VAC, 3 phase, 50 HZ, 18 Amp (208/230) / 9 Amp (400/460)

#### Site Specifications


Air Supply Requirements	9-10.3 bar (130-150 PSI)
Minimum Concrete Spec.	76 mm (3 in.) thick, 20,700 kPA (3000 PSI) rating
Maximum Floor Slope	51 mm (2 in.) over 3200 mm (126 in.)

#### Product Specifications

	RX45K	RX45KL
Max Vehicle Weight	4500 kg (10,000 lbs.)	
Max Wheelbase		
General Service	4343 mm (171 in.)	4673 mm (184 in.)
Two-Wheel Alignment	4216 mm (166 in.)	4547 mm (179 in.)
Four-Wheel Alignment	4013 mm (158 in.)	4013 mm (158 in.)
Alignment Height	All lock positions	
Min. Four-Wheel Alignment	2235 mm (88 in.)	
Lifting Speed	1 speed, 55 seconds	
Lowering Speed	2 speed, 25 seconds	

### MODEL FEATURES / DIMENSIONS / OPTIONS

Feature	PS	IS	Dimension	Options	Add Length	Kit #
Fully Integrated Alignment	✓	✓	<b>Length (L)</b>	<b>Approach Ramp Extensions (Back)</b>	457 mm 18 in.	20-3113-1
POWER SLIDE	✓	✓	ALL RX45K Models 6128 mm (241.25 in.)	<b>Approach Ramp Extensions (Back)</b>	1270 mm 50 in.	20-2189-1
INFLATION STATION		✓	ALL RX45KL Models 6458 mm (254.25 in.)	<b>Conventional Sensor Extensions (Front)</b>	305 mm 12 in.	20-2497-1
Two-Speed Lowering	✓	✓	<b>Deck Length (DL)</b>	<b>Drive-Thru Kit (Front)</b>	1346 mm 53 in.	20-2498-1
6000-lb Swing Air Jacks (optional)	opt.	opt.	ALL RX45K Models 4864 mm (191.5 in.)			
			ALL RX45KL Models 5194 mm (204.5 in.)			
			<b>Outside Width (W1)</b> 2248 mm (88.5 in.)			
			<b>Inside Width (W2)</b> 1016 mm (40 in.)			
			<b>Runway Width (R)</b> 610 mm (24 in.)			
			<b>Raised Height (H1)</b> 1829 mm (72 in.)			
			<b>Stack Height (H2)</b> 222 mm (8.75 in.)			

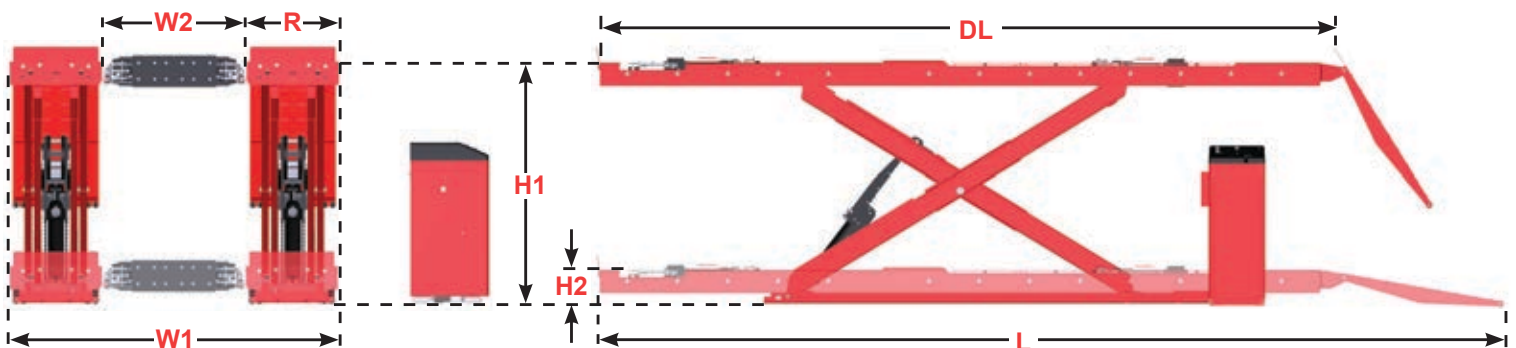

Continued on Page 2

For general inquiries visit:  
[www.hunter.com](http://www.hunter.com)


For local contact visit:  
[www.hunter.com/hunter-international](http://www.hunter.com/hunter-international)

# RX45K & RX45KL (PS & IS)

## Surface Mount Lift Rack

**HUNTER**  
Engineering Company

### SPECIFICATIONS

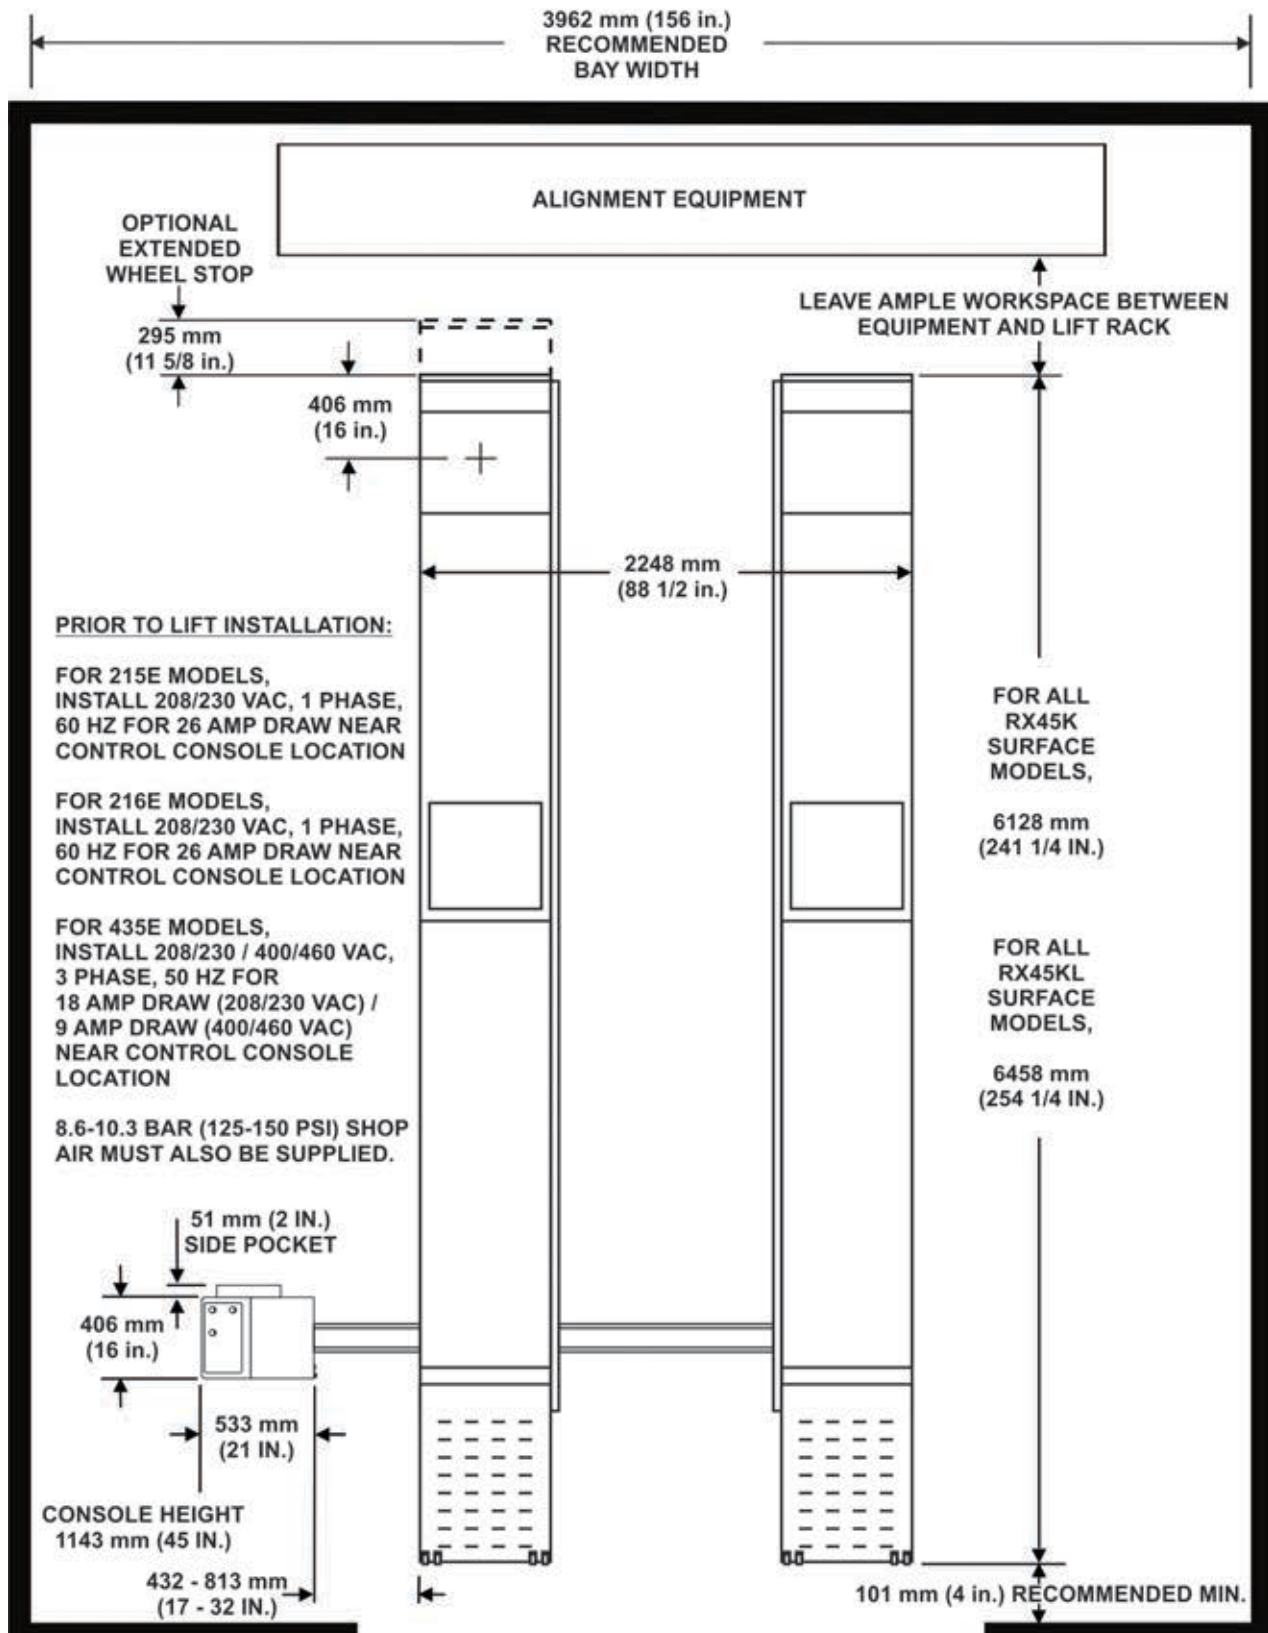

\*Non-standard positioning of control console is limited to a maximum space between console and rack of 1829 mm (72 in.) at the approach ramp end and 5029 mm (198 in.) at the turnplate end. Additional threshold will be required (refer to Installation Instruction for details).