

Bench Lathes

BL Series Brake Lathes

HUNTER
Engineering Company

SPECIFICATIONS





BL73 shown w/ optional bench, Hood, and Tablet

*with 1-7/8" Arbor. **19.5" with Hood

Power Requirements		
Location	BL0x and BL1x	BL2x and BL3x (W/ ACT / Digi-Cal)
Domestic	115 V, 15 A, 50-60 Hz 1ph	115 V, 15 A, 50-60 Hz 1ph
Optional	220 V, 7.5 A, 50-60 Hz 1ph	220 V, 7.5 A, 50-60 Hz 1ph
International	220 V, 7.5 A, 50-60 Hz 1ph	220 V, 7.5 A, 50-60 Hz 1ph
Optional	115 V, 15 A, 50-60 Hz 1ph	NA
Base Model		W/Anti-Chatter Technology
Rotor Diameter**	6-22 in. (152.4-584.2 mm)	6-22 in. (152.4-584.2 mm)
Rotor Max Width	5 3/8 in. (136.5 mm)	5 3/8 in. (136.5 mm)
Rotor Max Thickness	2 in (50.8 mm)	2 in. (50.8 mm)
Drum Diameter**	6-24 in. (152.4-609.6 mm)	6-24 in. (152.4-609.6 mm)
Drum Max Width	8 in. (203.2 mm)	8 in. (203.2 mm)
Max Arbor Weight*	200 lbs (90.7 kg)*	200 lbs (90.7 kg)*
Motor	1.5 hp (1.12 kw)	1.5 hp (1.12 kw)
Spindle Speeds	85,110,175 rpm	85,110,175 rpm
Feed Rate	002-.014 in./rev(.05 -.36 mm/rev.) Infinitely Variable	002-.014 in./rev(.05 -.36 mm/rev.) Infinitely Variable

	BL00	BL01	BL03	BL10	BL11	BL13	BL60	BL61	BL63	BL70	BL71	BL73
Tablet							✓	✓	✓	✓	✓	✓
Rotor Capability				✓	✓	✓				✓	✓	✓
ACT / DigiCal 2.0							✓	✓	✓	✓	✓	✓
Bench		✓	✓		✓	✓		✓	✓		✓	✓
Dust Collection Hood			✓			✓			✓			✓
Width (W)	43.5" 1105 mm	45" 1143 mm	43.5" 1105 mm	48" 1219 mm	43.5" 1105 mm	45" 1143 mm	48" 1219 mm	45" 1143mm	48" 1219mm	43.5" 1105mm	45" 1143mm	48" 1219mm
Height (H)	13" 330mm	75.5" 1918mm	75.5" 1918mm	13" 330mm	75.5" 1918mm	75.5" 1918mm	13" 330mm	75.5" 1918mm	75.5" 1918mm	13" 330mm	75.5" 1918mm	75.5" 1918mm
Depth (D)	36.5" 927mm	41" 1041mm	53.5" 1359mm	36.5" 927mm	41" 1041mm	53.5" 1359mm	36.5" 927mm	41" 1041mm	53.5" 1359mm	36.5" 927mm	41" 1041mm	53.5" 1359mm

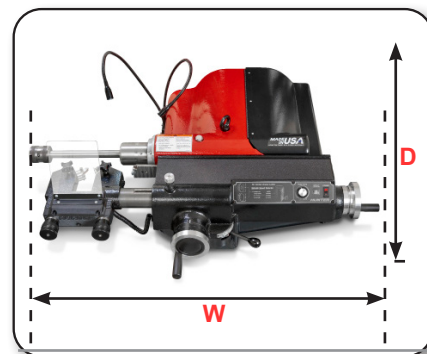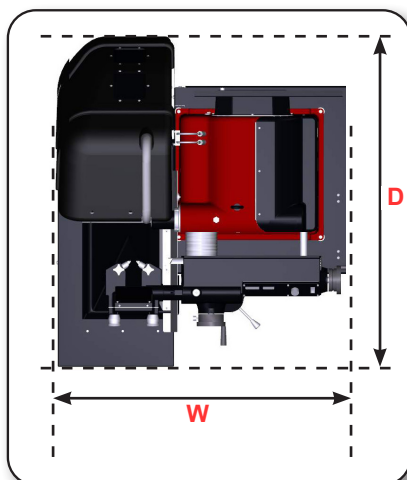

For general inquiries visit:
www.hunter.com
or call
800-448-6848

Because of continuing technological advancements, specifications, models and options are subject to change without notice.