

TCA34S

Tire Changer

HUNTER
Engineering Company

SITE REQUIREMENTS

TCA34S





TCA34S	
Power Requirements	208-230V, 15A, 50/60Hz, 1 ph NEMA 20 amp plug, L6-20P
Air Supply Requirements	115-175 psi (8-12 bar)
Shipping Weight	1,128 lbs (511 kg)
Width (W)	48 in. (1,219 mm)
Height (H)	72 in. (1,829 mm)
Depth (D)	74 in. (1,880 mm)

KEY SPECIFICATIONS

TCA34S	
Mount / Demount Tool	Polymer Self Inserting Leverless
Clamping Type	Center w/Quick Clamp and Cam Plate
Bead Loosening Type	Upper / Lower Roller
Match Mounting Capable	Yes
Adjustable Clamping Height	Yes
Rim Diameter Range	10-30 / 12-32 / 14-34 in.
Maximum Tire Diameter	50 / 52 / 54 in. (1270 / 1321 / 1372 mm)
Maximum Wheel Width	19 in.
Wheel Lift Capacity	176 lbs. (80 kg)
Drive	Variable up to 14 rpm CW 7 rpm CCW Torque: 867 ft-lbs (1175 Nm)

TCA34S Dimensions

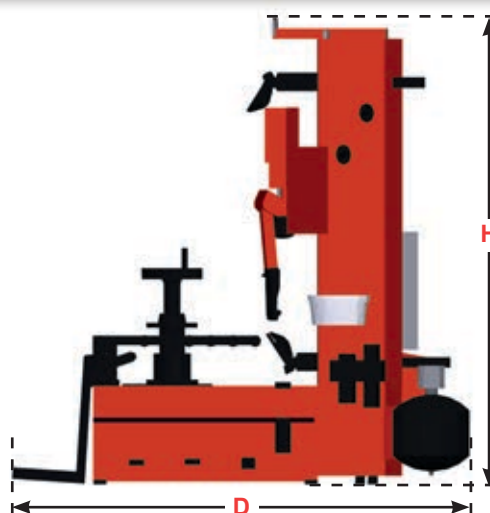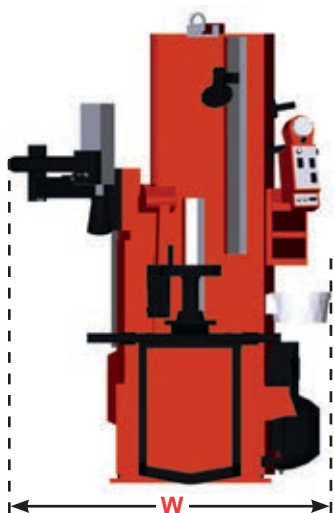

For tire changer information visit:
www.hunter.com/tire-changers

For local contact visit:
www.hunter.com/contact-hunter

For general inquiries visit:
www.hunter.com or call 800-448-6848