

# TC33 Series Tire Changers

**HUNTER**  
Engineering Company

## SITE REQUIREMENTS



TC 33 Shown

\* Width at Max Side Shovel Opening


	TC33	TC33PL	TC33BP
Electrical Requirments	220V, 1ph, 6A, L6-20P	220V, 1ph, 6A, L6-20P	220V, 1ph, 6A, L6-20P
Air Pressure Range	115-175 psi	115-175 psi	115-175 psi
Clamping Diameter	10in - 26 in	10in - 26 in	10in - 26 in
Rotating Speed	0-14 RPM CW (variable) / 14 RPM CCW	0-14 RPM CW (variable) / 14 RPM CCW	0-14 RPM CW (variable) / 14 RPM CCW
MAX Tire Diameter	50 in	50 in	50 in
Max Bead Loosening Opening Width	17 in	17 in	17 in
Shovel Power	6,600 lbs @140 psi	6,600 lbs @140 psi	6,600 lbs @140 psi
Shipping Weight	510 lbs.	580 lbs.	580 lbs.
Width (W)	70 in *	70 in *	70 in *
Height (H)	68 in	68 in	68 in
Depth (D)	46 in	46 in	46 in

\* NEMA L6-20P included

\*\* Some Dimension, capacities, and specifications may vary depending on tire and wheel configurations. Larger size and reverse rim applicability case by case.

## KEY SPECIFICATIONS

TC33 Series Tire Changers	Adjustable Work Height	Side Shovel	Bead Press Arm	Plus Roller Arm
TC33	✓	✓		
TC33PL	✓	✓		✓
TC33BP	✓	✓	✓	

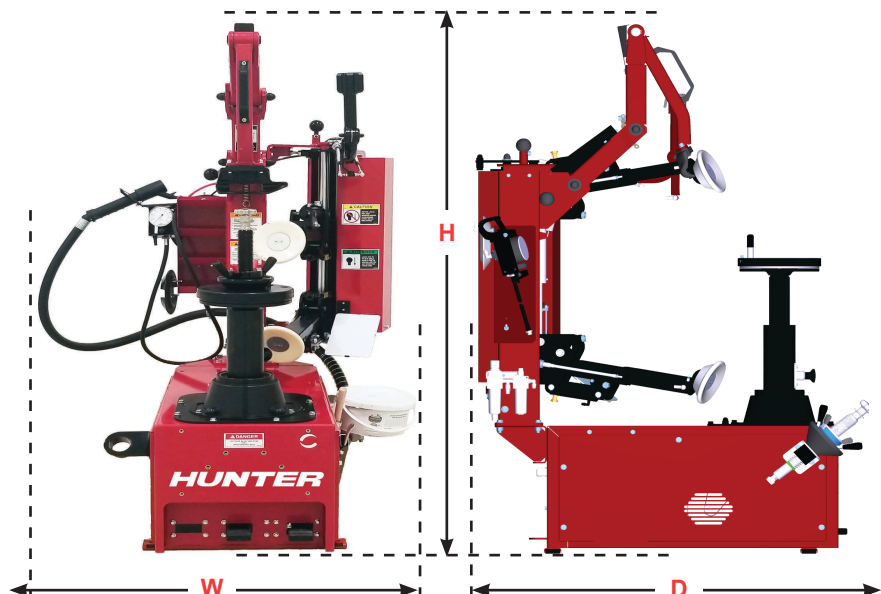

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

For tire changer information visit:  
[www.hunter.com/tire-changers](http://www.hunter.com/tire-changers)

For local contact visit:  
[www.hunter.com/contact-hunter](http://www.hunter.com/contact-hunter)

For general inquiries visit:  
[www.hunter.com](http://www.hunter.com)  
or call  
**800-448-6848**



TC 33PL Shown



TC 33BP Shown