

# TCX625HD & TCX625PHD


## Heavy Duty Tire Changer

**HUNTER**  
Engineering Company


### SITE REQUIREMENTS / KEY SPECIFICATIONS

SITE REQUIREMENTS	
Models & Operating Voltages	TCX625-2-1-6 (230 V, 1 Ph, 60 Hz) TCX625-2-3-6 (230 V, 3 Ph, 60 Hz) TCX625-4-3-5 (400 V, 3 Ph, 50 Hz)
Shipping Weight	530 kg (1,168 lbs)
Width (W)	2,184 mm (86 in.)
Height (H)	1,016 - 1,321 mm (40 - 52 in.)
Depth (D)	635 - 1,651 mm (25 - 65 in.)

SPECIFICATIONS	
Wheel Assembly	
Max. Diameter	1,397 mm (55 in.)
Max. Width	686 mm (27 in.)
Max. Weight	700 kg (1,545 lbs.)
Min. Rim-Center Hole Diameter	100 mm (3.94 in.)
Max. Rim Diameter	368 - 622 mm (14.5 - 24.5 in.)
Match Mounting Capable	Yes
Torque	1,695 N•m (1,250 ft.-lbs.)
Rotation Speed	7 rpm CW & CCW

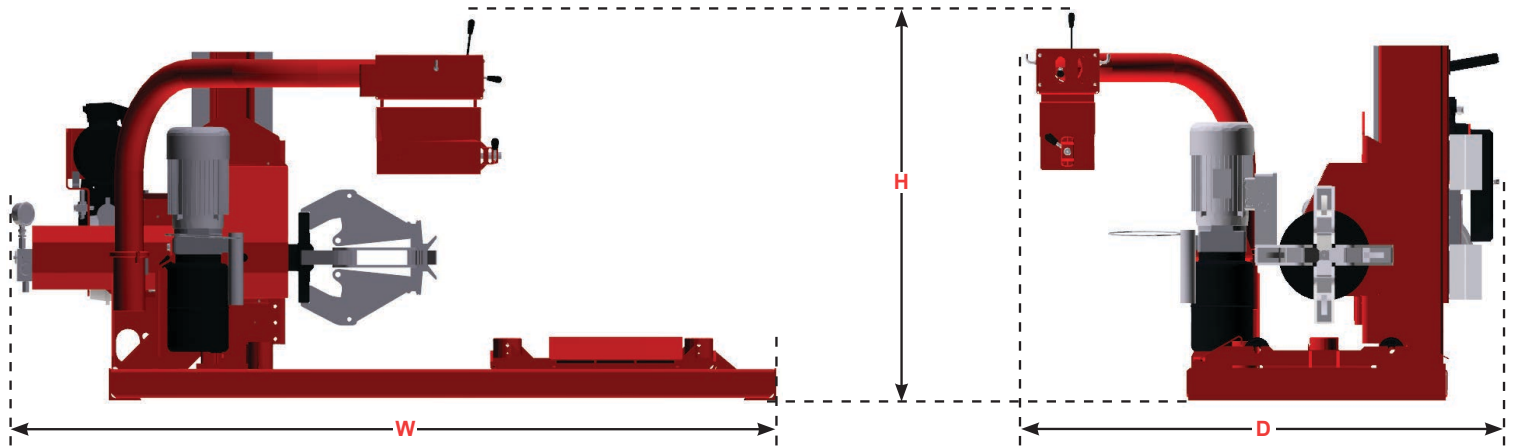

### MODEL ACCESSORIES

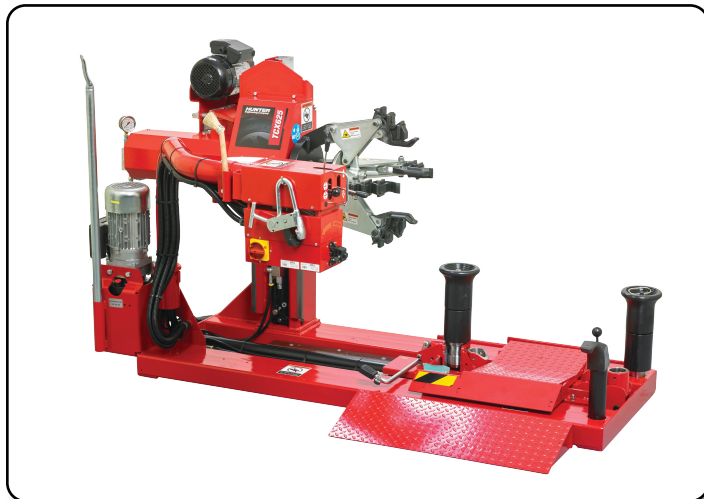

TCX625HD

For tire changer information visit:  
[www.hunter.com/tire-changers](http://www.hunter.com/tire-changers)

For general inquiries visit:  
[www.hunter.com](http://www.hunter.com) or call 800-448-6848

For local contact visit:  
[www.hunter.com/contact-hunter](http://www.hunter.com/contact-hunter)

ACCESSORIES	Standard	Optional
Aluminum Wheel Clamp	✓	
Steel Wheel Clamp	✓	
Tire Paste & Brush	✓	
Hook & Hook Pin	✓	
Roller	✓	
Lever	✓	
Two Ramps		✓
Pocket V-Cover		✓
Mounting Lever		✓
Aluminum Jaw Covers		✓

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

Form 7179-TE 06-16b  
Copyright © 2016-2019, Hunter Engineering Company