

Quick Check Drive HD™



Quick Check Drive HD™ Installation


NOTE: See form QM07936-05 for complete information, including environmental specifications and UL certifications.

Site Specifications	
Power Requirements	115/230v, 15 amp* 50/60 Hz 1 ph ¹
Internet Connection	Hardwired, 20+mbps up and down, Ping Spread faster than 1000 ms.
Operating System	Windows® 10 - 64 Bit
Cable Length	75 ft. / 22 m per tower (Cat5e)
Product Specifications	
Min Req. Light Condition	600 Lux
Test Entry Speed	2 to 8 mph (3-13 km/h)
Shipping Weight	
Quick Check Cabinet (US/CAN)	WU572: 393 lb (179 kg), WU592: 161 lb (73 kg)
Quick Check Cabinet (Intern.)	WU570E:393 lb (179 kg) WU590E:161lb (73 kg)
Quick Check Drive Commercial	346 lbs (157 kg)
*Amperage shown is minimal circuit rating. ¹ Isolated ground recommended.	

OVERALL FOOTPRINT

*Recommended site layout for Quick Tread Heavy™ in-line with Quick Check Commercial.

- A:** 53.5 in. / 1358.9 mm. QTH Footprint Length.
- B:** 265 in. / 6731 mm. Typical Max Wheel-base.
- C:** 78 ft. / 23 m Total Typical Recommended Area Length (including short focal length camera).
- D:** 20 ft. / 6 m Recommended Bay Width.
- E:** 75 ft. / 23 m of communication cables connect console to Quick Tread Cabinet. Add cable as necessary.
- F:** 14.6 +/- 6 in. / 4267 - 4572 mm. Tower Spacing, face-to-face.
- G:** Distance from external camera to QCD Tower is dependent on many variables. See 7604-T for full details

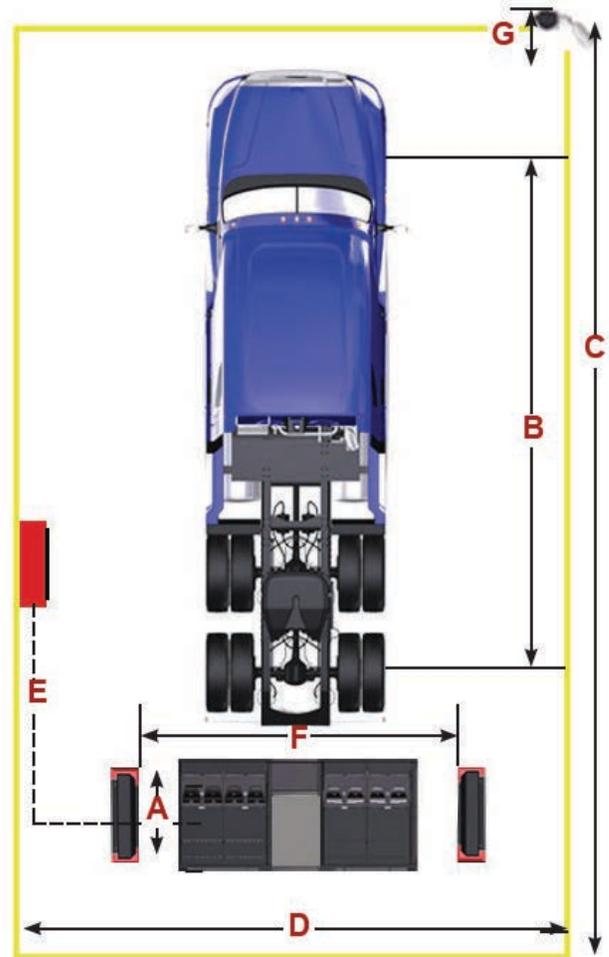

Continued on Page 2


For inspection information visit:
www.hunter.com/inspection

For general inquiries visit:
www.hunter.com
or call
800 448-6848


For local contact visit:
www.hunter.com/contact-hunter

Form QS07927-00, 07-21
Copyright © 2021 Hunter Engineering Company

QUICK CHECK COMMERCIAL CABINET DIMENSIONS

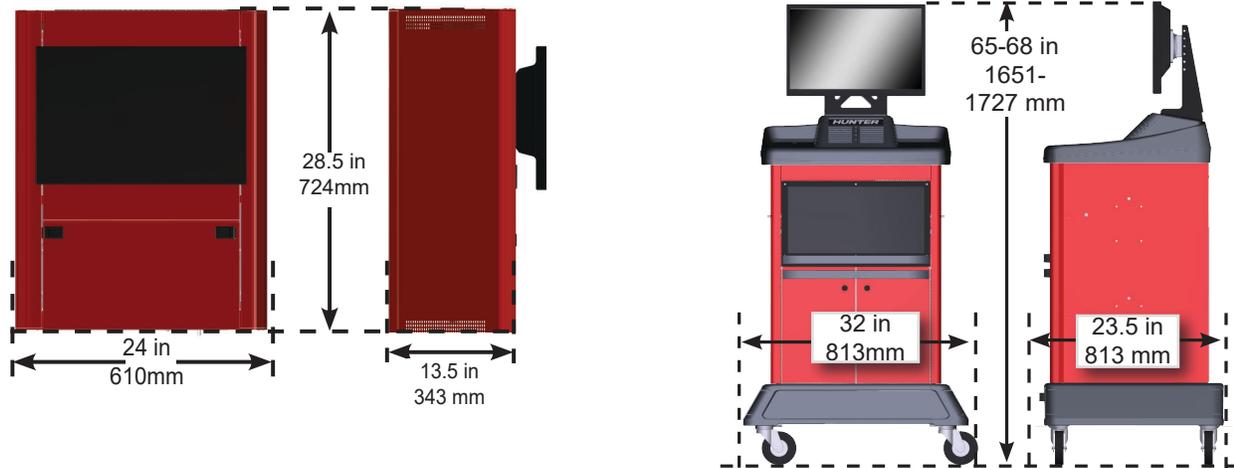

QUICK CHECK COMMERCIAL DIMENSIONS

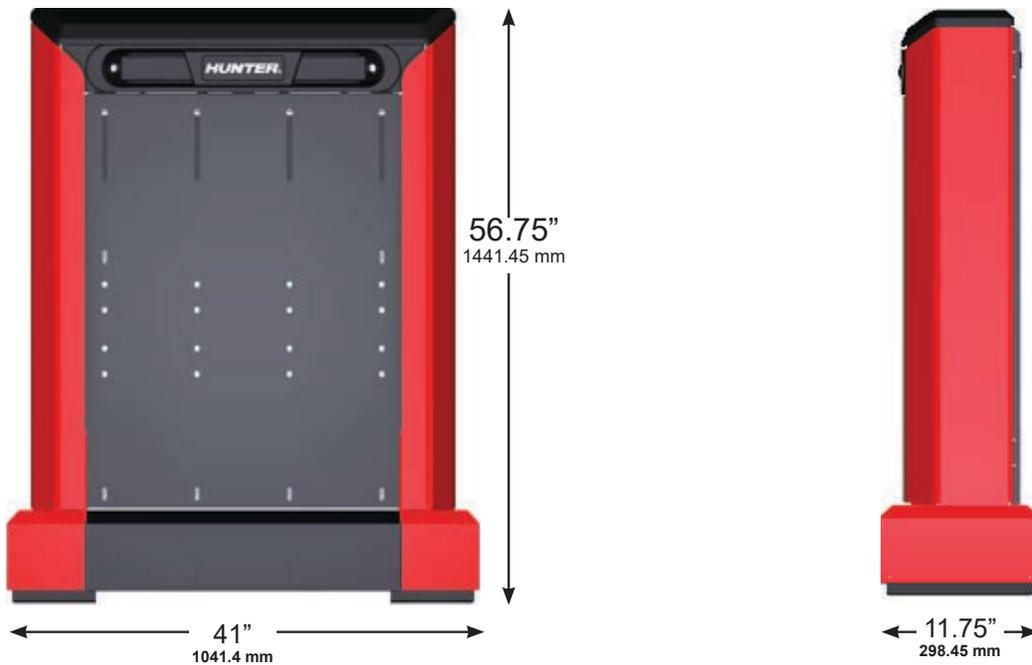

Example Configuration shown. Actual Pad Size Dependent on vehicle length.

