

SmartWeight® Pro Wheel Balancer

HUNTER
Engineering Company

SPECIFICATIONS




SWP90 with Hood and Outer Laser option

Power Requirements	208-240V, 3 amp, 50/60 Hz, 1 ph (NEMA 20 amp plug, L6-20P)
Air Supply Requirements	100-175 psi (7-12 bar)
Internet Recommendations	Hardwire or Wireless add on, 10+mbps up and down
Capacity	
Rim Width	(38 mm to 508 mm) 1.5 in to 20 in
Rim Diameter	(254 mm to 762 mm) 10 in to 30 in *
ALU	(191 mm to 965 mm) 7.5 in to 38 in *
Max. Tire Diameter	(965 mm) 38 in
Max. Tire Width	(508 mm) 20 in
Max. Tire Weight	(68 kg) 150 lbs
Imbalance Resolution	(± 1.0 g) 0.05 oz
Placement Accuracy	512 positions, ± 0.35°
Balancing Speed	150 rpm
Motor	Programmable drive system and DC motor
Shipping Weight	311 lb.

* Extreme wheel sizes may require manual data entry.

MODEL OPTIONS / DIMENSIONS

	SWP60	SWP70	SWP90	Field Options
Outer Laser		✓	✓	• Quick Nut
Hood	✓	✓	✓	
Electric Speed Clamp			✓	• BullsEye® Collets
Width (W)	1346 mm 53 in	1346 mm 53 in	1346 mm 53 in	• HammerHead® TDC Laser
Height (H)	1816 mm 71.5 in	1816 mm 71.5 in	1816 mm 71.5 in	
Depth (D)	832 mm 32.75 in	832 mm 32.75 in	832 mm 32.75 in	• Wheel Lift
				• Electric Speed Clamp

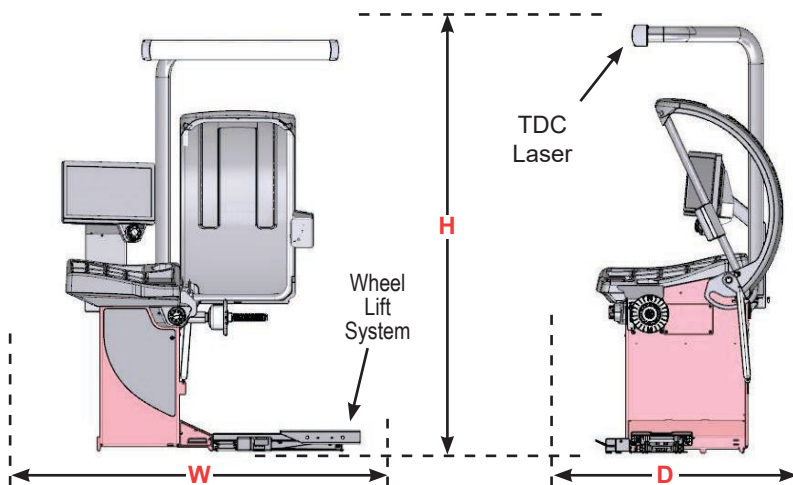

For balancer information visit:
<https://www.hunter.com/en-int/wheel-balancers/>

For local contact visit:
<https://www.hunter.com/en-int/contact/international/>

For general inquiries visit:
<https://www.hunter.com/en-int/> or call
1-314-731-3020